
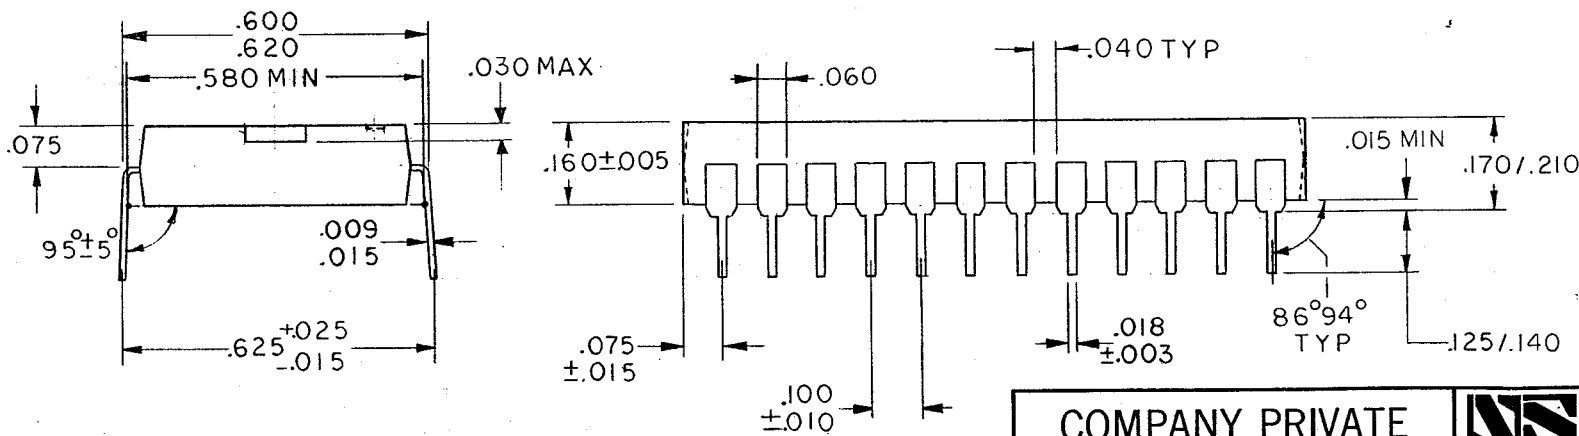


| | | | | REVISIONS | | | | | | | | | | |
|-----|-------|--|--------|-----------|------------|---|---|---|--------|----------|-----|--|--|--|
| REV | SHEET | DESCRIPTION | E.C.D. | DATE | APPROVED | | | | | | | | | |
| B | 1 | ADDED 95° ± 5° AND 86°/94° TYP | D 3792 | 3-23 79 | Joe Weber | ⊖ | 1 | NEW DRAWING | D-012 | 4-18-79 | RHH | | | |
| C | 1 | INCORPORATED N24B INTO N24A. | D6888 | 4/21/82 | T. Speller | A | 1 | ADDED .380 MIN, MKT TO DWG NO. AND OR COPPER TO NOTE, PIN NO. 1 IDENT | D 3502 | 12-11-78 | M/S | | | |
| D | 1 | ADDED EJECTOR PINS | 00112 | 7.19.83 | T. Speller | | | | | | | | | |
| E | 1 | ADDED DIMS. .120/.210, .060, CHANGED DIMS. 1.270 MAX. TO 1.243/1.270, .125 MIN. TO .125/.140 | 00843 | 11-28-83 | T. Speller | | | | | | | | | |

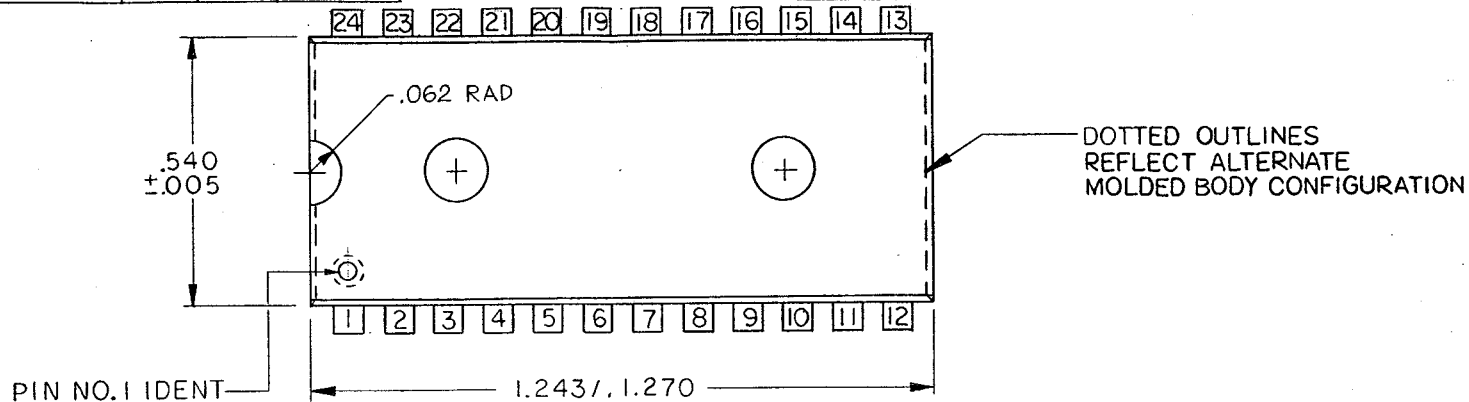

STANDARD LEAD FINISH :
 200 μ MINIMUM LEAD/TIN 37/63
 ON ALLOY 42 OR EQUIVALENT, OR COPPER

| | | | | | |
|--------------------------|-------|------------------|------------------|---|----|
| COMPANY PRIVATE | | | | National Semiconductor Corporation 2900 Semiconductor Drive, Santa Clara, Calif. 95051 | |
| DRAWN: M.MACIEL3-6-73 | DATE: | APPROVED: RHH | DATE: 3-12-73 | 24-LEAD MOLDED DIP(N) | |
| CHECKED: | DATE: | APPROVED: RHH | DATE: | | |
| ENGINEER: | DATE: | RELEASED: RHH | DATE: 5/4 | B MKT-N24A | E |
| | | | | SHEET | OF |
| | | | | REV. | |